



MU series MU1500S



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Standby Power Applications

【Design Life】

Up to 20 Years in Standby Service at 25°C
Eurobat (20°C) : >12 YEARS VERY LONG LIFE

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge : -15°C ~ 40°C (5°F~104°F)
Storage : -15°C ~ 40°C (5°F~104°F)

【Float Charging Voltage】

2.21 ~ 2.25 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】


2.35 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Nominal Voltage	2V (single cell per unit)		
Nominal Capacity	1500 Ah @10hr-rate to 1.80V per cell @25°C (77°F)		
Weight	Approx. 91.50 Kg (201.67 lbs)		
Maximum Discharge Current	9000 A (5sec)		
Internal Resistance	Approx. 0.31 mΩ		
Short Circuit Current	--		
Maximum Charge Current	450 A		
Terminal types	I3 thread copper alloy terminal to accept M10 bolt		
Terminal tightening torque	249±50 Kgf·cm / 216±43 Lbf·in / 24.4±4.9 N·m		
Container Material	Flame Retardant Polypropylene (UL 94-V0)		
Dimensions	Length (L)	437.0±3.0 mm	17.20±0.12 inch
	Width (W)	172.0±3.0 mm	6.77±0.12 inch
	Depth (D)	497.0±3.0 mm	19.57±0.12 inch

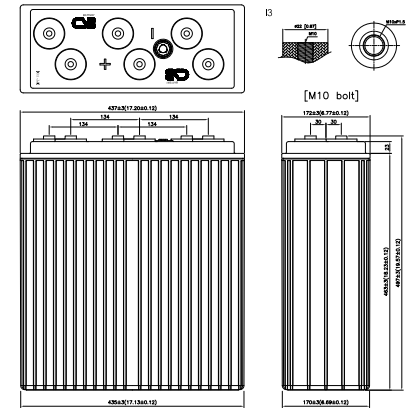

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	1630	1017	763	625	534	470	308	263	205	169	84.5	70.4
1.67V	1563	993	746	610	522	459	301	258	201	165	82.5	68.8
1.70V	1475	956	725	591	504	442	291	251	195	160	80.0	66.7
1.75V	1351	904	688	566	483	425	282	243	190	156	78.0	65.0
1.80V	1210	830	641	533	415	401	269	232	183	150	75.0	62.5
1.83V	1071	754	591	497	426	375	254	220	175	143	71.5	59.6

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	2559	1759	1328	1100	943	832	554	476	373	309	155	129
1.67V	2516	1728	1306	1086	932	822	548	472	370	305	153	127
1.70V	2463	1683	1283	1064	909	800	535	467	365	301	151	125
1.75V	2310	1600	1225	1024	878	774	522	454	357	295	148	123
1.80V	2130	1486	1154	975	836	738	503	436	346	285	143	119
1.83V	1960	1380	1087	929	798	705	485	420	336	276	138	115

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 200921

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565