




Dimensions



* Panasonic offers batteries with tabs or lead wires.

Features & Benefits


- In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in the temperatures up to 125°C

Specifications

Part number		BR2330A
Nominal voltage		3V
Nominal capacity		255mAh
Continuous drain		0.03mA
Dimensions* ¹	Diameter(Max.)	23.0mm
	Height(Max.)	3.0mm
Weight* ¹		Approx. 3.2g
Operating temperature* ²		-40°C to +125°C

*¹ Without tabs.

Discharge temperature characteristics

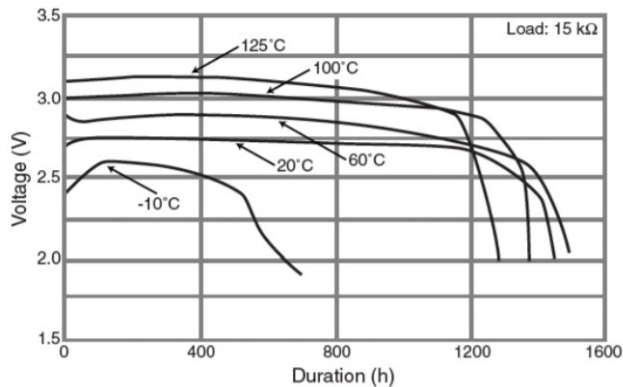

Applications

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup(host computers, FA equipment), etc.

This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. As of March, 2021. The contents of this product information are subject to change without notice.

Please visit our website at:

Panasonic Corporation

<https://industrial.panasonic.com/ww/products/batteries/primary-batteries/lithium-batteries>

